

FIG. 1

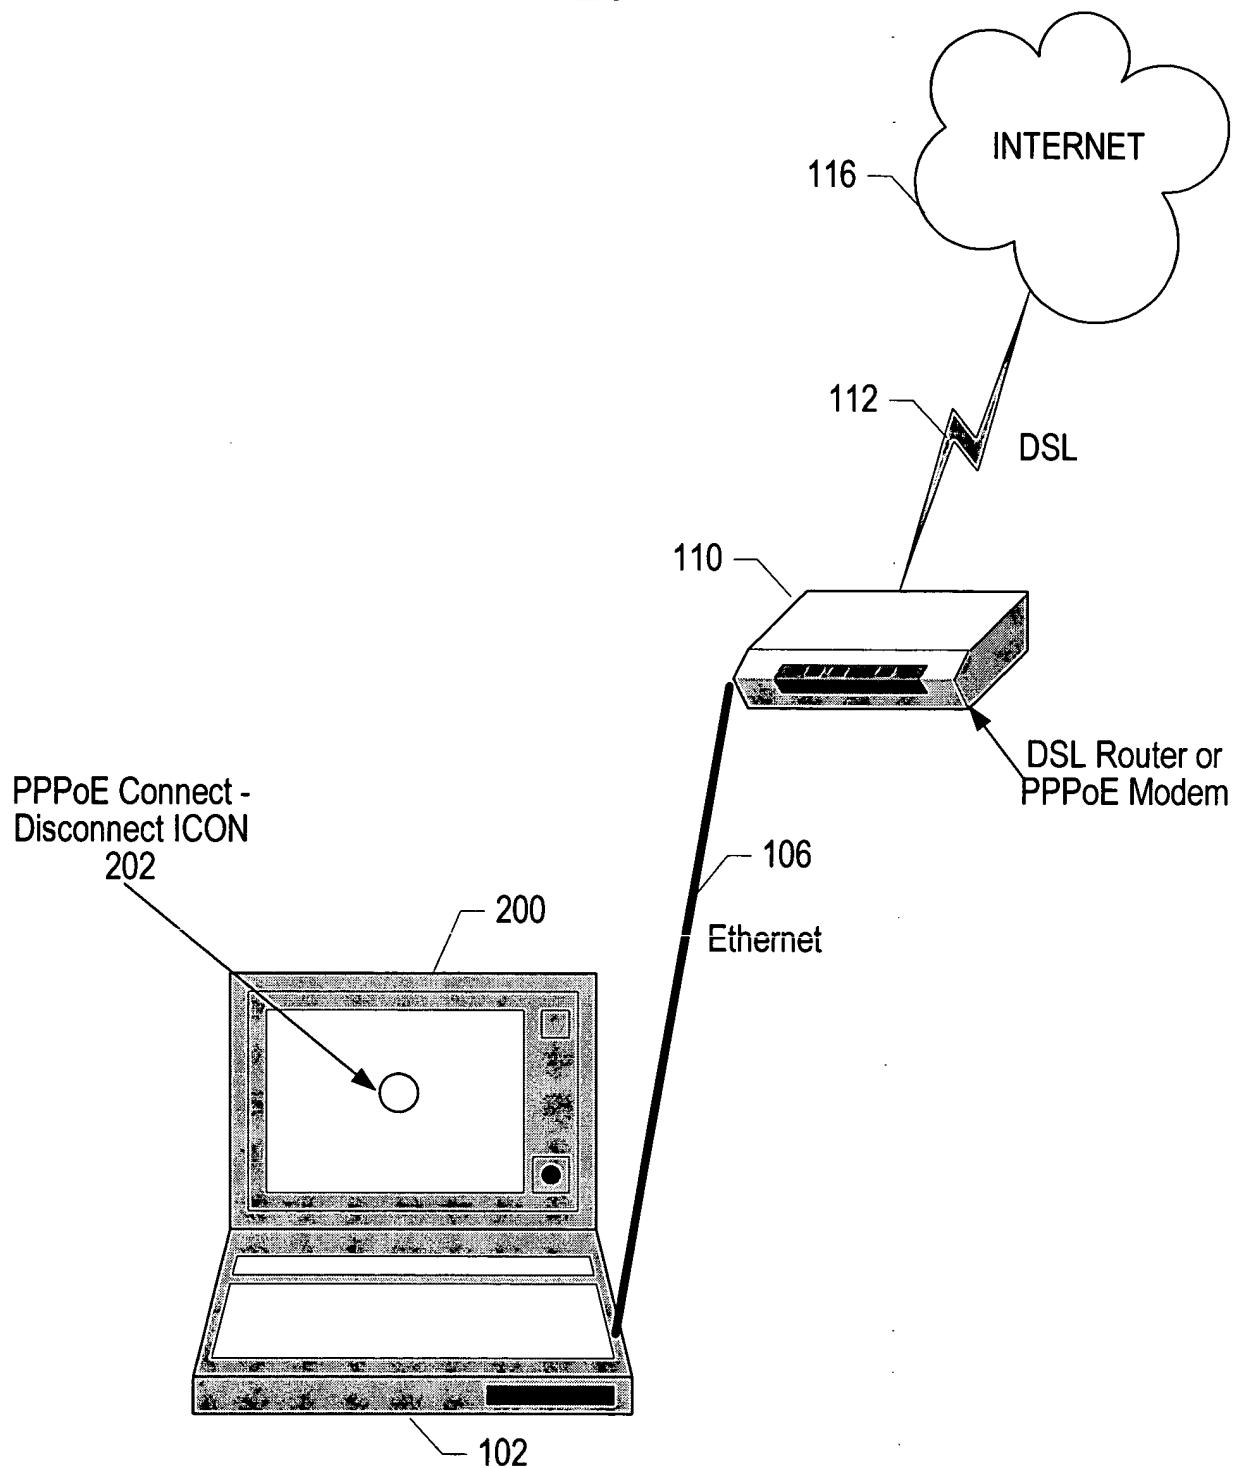


FIG. 2

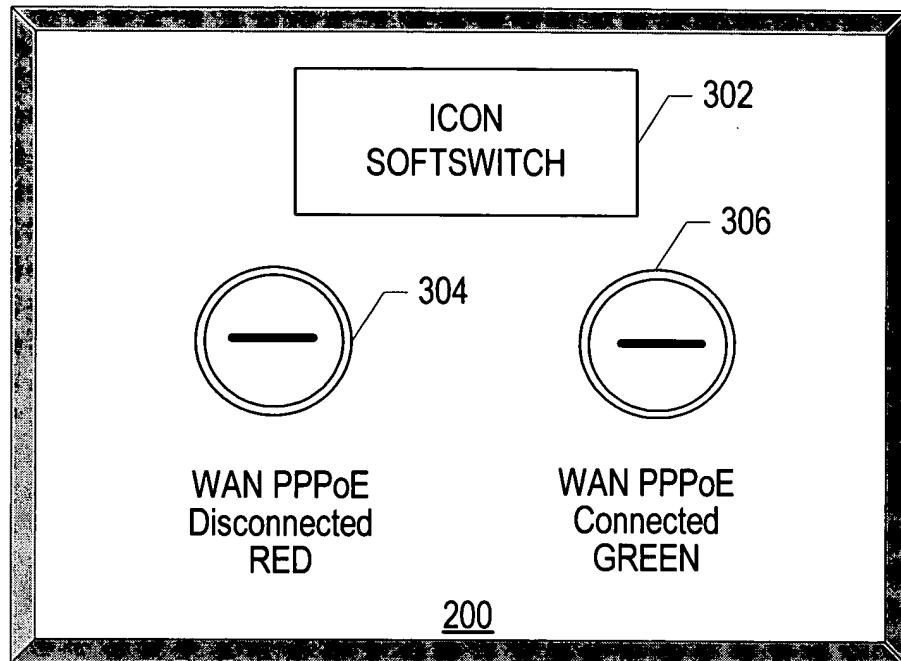


FIG. 3

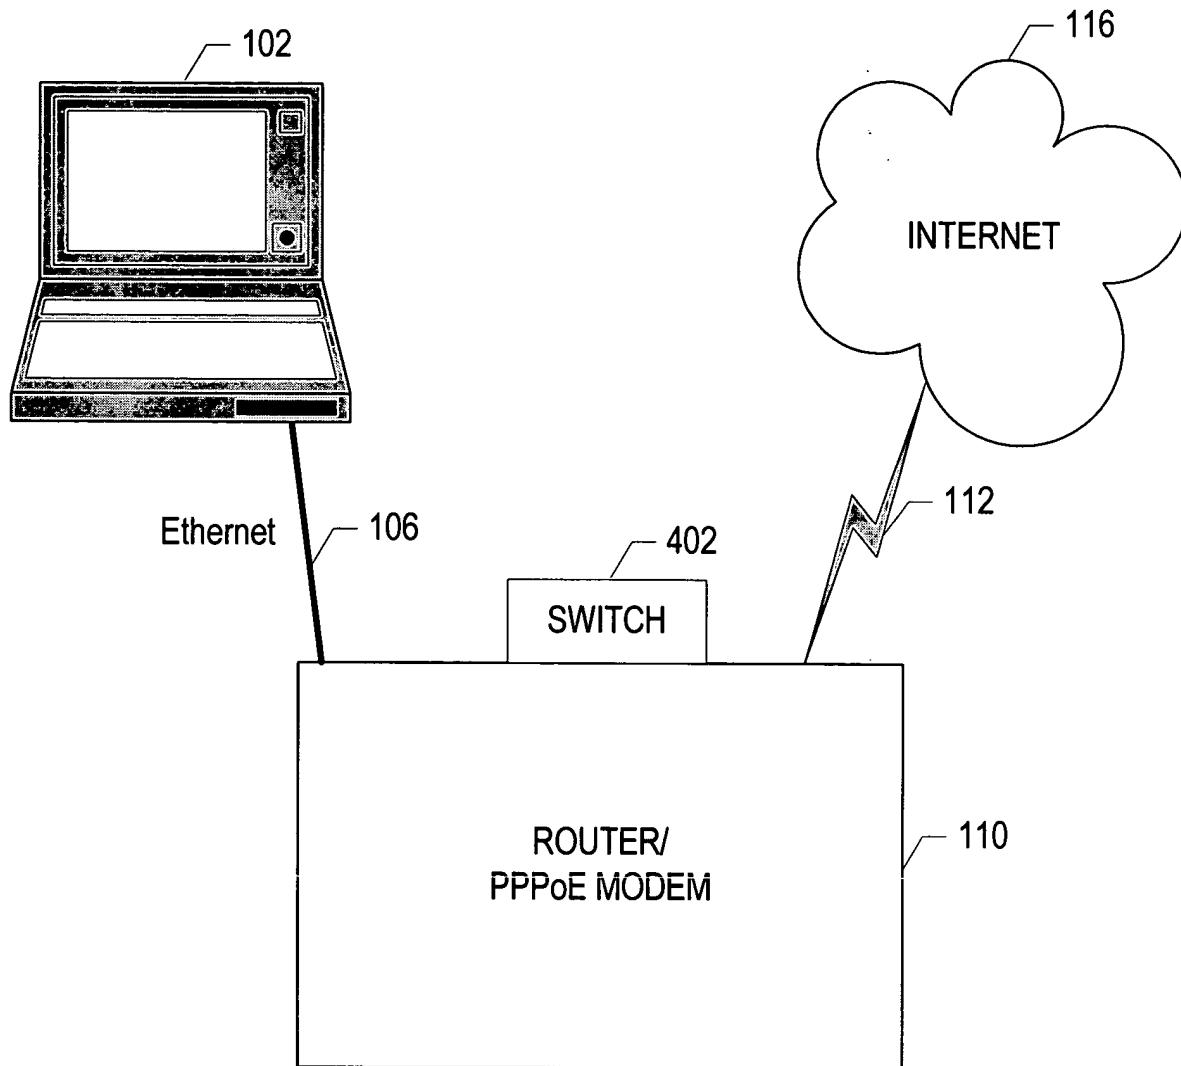


FIG. 4

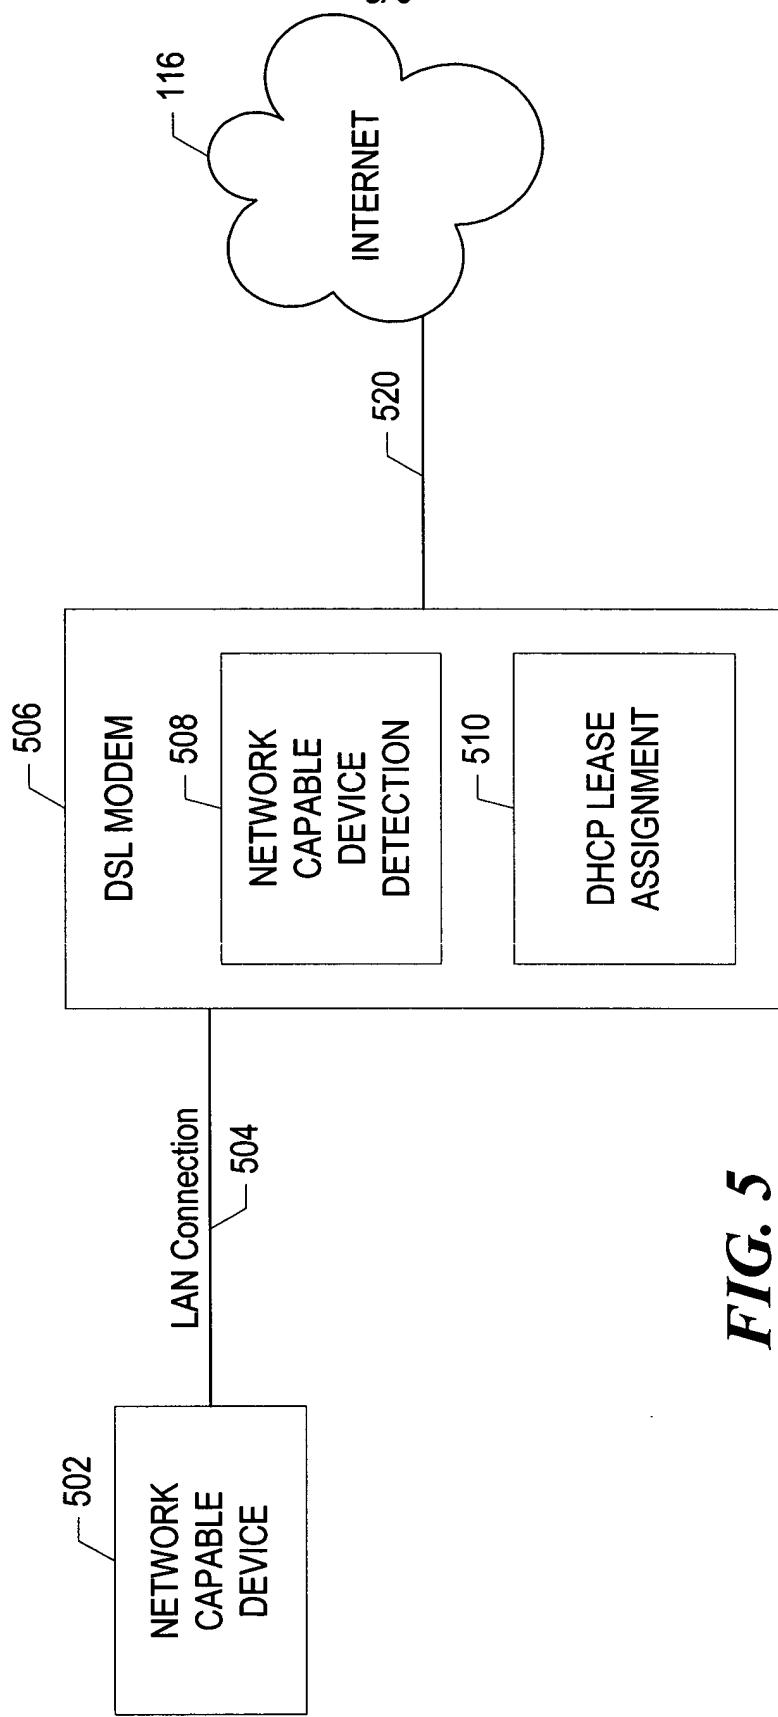


FIG. 5

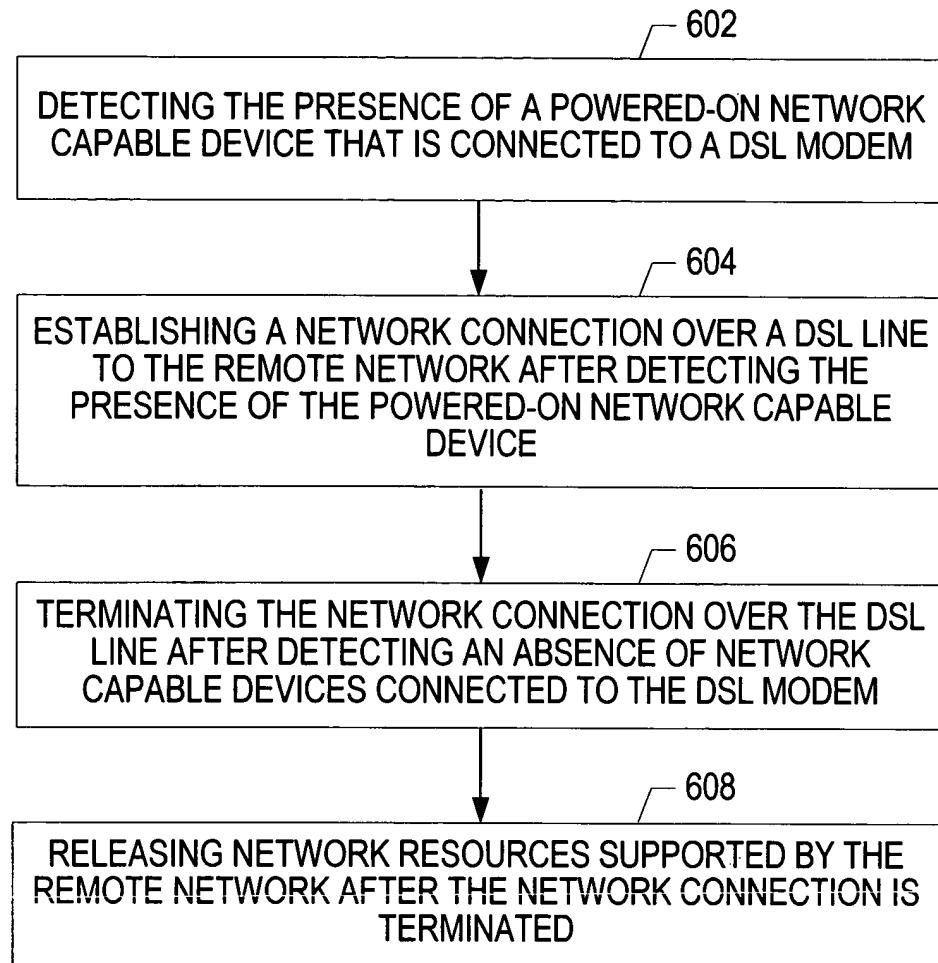


FIG. 6

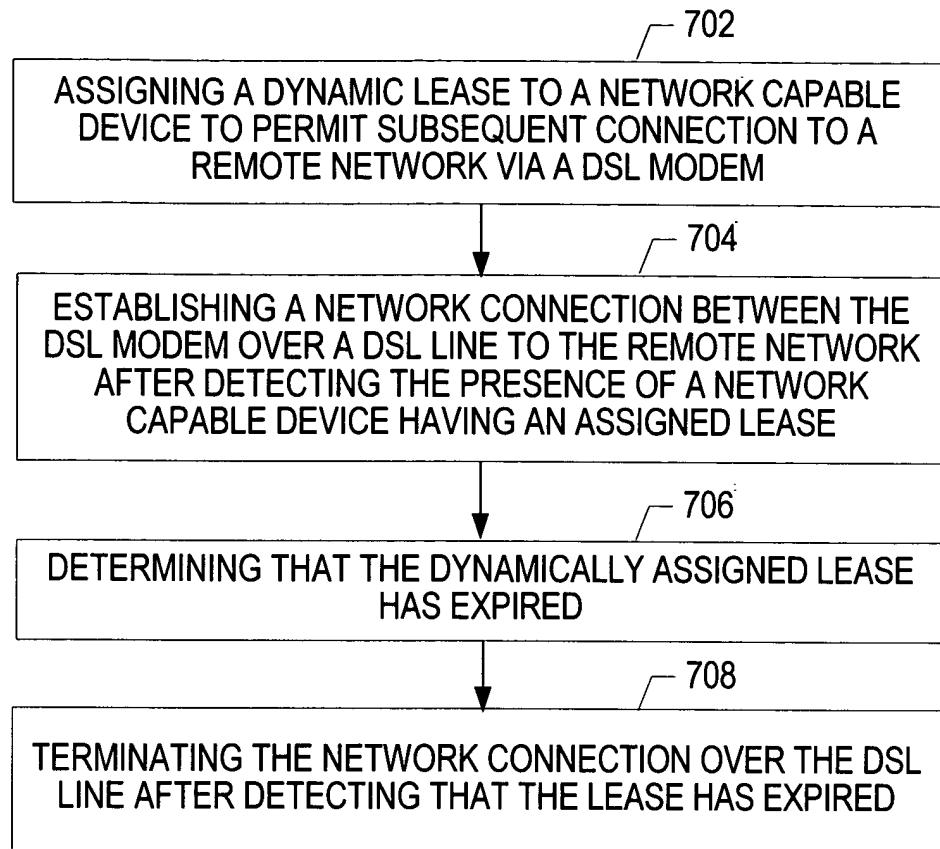


FIG. 7

802

RECEIVING A USER COMMAND AFTER A USER SELECTS A GRAPHIC DISPLAY ICON ON A DISPLAY SCREEN, THE SELECTION OF THE GRAPHIC DISPLAY ICON TO SELECTIVELY CONNECT A PPPoE WIDE AREA NETWORK CONNECTION FROM A ROUTER TO A REMOTE NETWORK

804

INSTRUCTING THE ROUTER TO MAKE A PPPoE CONNECTION OVER THE WIDE AREA NETWORK IN RESPONSE TO RECEIVING THE USER COMMAND

806

RECEIVING A SECOND USER COMMAND AFTER THE USER SELECTS THE GRAPHIC DISPLAY ICON TO DISCONNECT THE PPPoE CONNECTION AND INSTRUCTING THE ROUTER TO DISCONNECT THE PPPoE CONNECTION IN RESPONSE TO RECEIVING THE SECOND USER COMMAND

FIG. 8

RECEIVING A MANUAL CONNECTION COMMAND AFTER A USER ACTIVATES A SWITCH ON A DIGITAL SUBSCRIBER LINE (DSL) ROUTER. THE SWITCH IS USED TO SELECTIVELY CONNECT A PPPoE WIDE AREA NETWORK CONNECTION FROM THE DSL ROUTER TO A REMOTE NETWORK

904

INSTRUCTING THE ROUTER TO MAKE A PPPoE CONNECTION OVER THE WIDE AREA NETWORK IN RESPONSE TO RECEIVING THE MANUAL CONNECTION COMMAND

906

RECEIVING A MANUAL DISCONNECT COMMAND AFTER THE USER ACTIVATES THE SWITCH TO DISCONNECT THE PPPoE CONNECTION

908

INSTRUCTING THE ROUTER TO DISCONNECT THE PPPoE CONNECTION IN RESPONSE TO RECEIVING THE MANUAL DISCONNECT COMMAND

FIG. 9